



CURVE IN ACCIAIO INOX


RICAVATE DA TUBO EUD: AISI 304L - 316L
 ESECUZIONE: 90°
 RAGGIO: 1,5 D
 NORMA: EN10253-3
 NON SMUSSATE

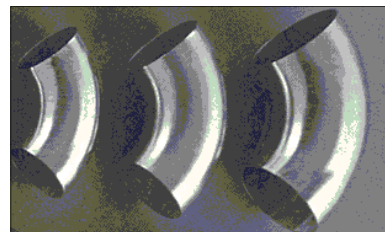

DIAM. D	RAGGIO A	SPESS. T	DIAM. D	RAGGIO A	SPESS. T
13,5	20,5	1,5	44,5	51	1,5-2
16	24	1,5	44,5	66	1,5-2
17,2	28,5	1,5-2	48,3	57,1	1,5-2-3
18	27	1,5-2	50	75	1,5-2
20	30	1,5-2	50,8	75	1,5-2
21,3	28	1,5-2-2,5	52	78	1,5-2
21,3	31,8	1,5-2-2,5	53	79,5	1,5
21,3	38	1,5-2-2,5	54	68,5	1,5-2
23	34,5	1,5	57	77	2-3
25,4	38	1,5-2	60,3	76,2	1,5-2-3
26,9	28,5	1,5-2-2,5-3	63,5	94,5	1,5-2
28	42	1,5-2	70	92	1,5-2-3
30	33,5	1,5-2	73	109,5	1,5
30	45	1,5-2	76,1	96	1,5-2-3-4
32	48	1,5-2	80	120	1,5-2
33	49,5	1,5	84	126,5	2
33,7	38,1	1,5-2-3	88,9	114,3	1,5-2-3-4
35	52,5	1,5	101,6	133,5	1,5-2-3
38,1	57	1,5-2	104	150	2
40	60	1,5-2	108	142,5	2-3
42,4	47,6	1,5-2-3	114,3	152,5	2-3-4
43	64,5	1,5			

RICAVATE DA LAMIERA AISI 304L - 316L

DIAMETRO	ASA	ISO	RAGGIO	SP.
esterno mm	pollici	nominale	curvatura	mm
129,1			187	2 - 3
139,7	5"	125	192	2 - 3
154			225	2 - 3
168,3	6"	150	226	2 - 3
204			300	2 - 3
219,1	8"	200	305	2 - 3
254			380	2 - 3
273	10"	250	400	2 - 3
304			450	2 - 3
323,9	12"	300	480	2 - 3
355,6	14"	350	530	2 - 3
406	16"	400	600	2 - 3
457,2	18"	450	680	3

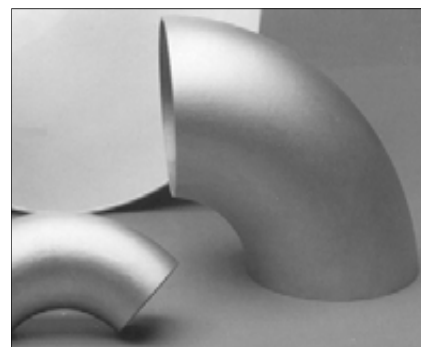

ESECUZIONE: 90°
 RAGGIO: 1,5 D
 NORMA: EN10253-3