


RACCORDI MICROFUSI
 AISI 316L CLASSE ANSI 150 (PN 10)

N.B.: Le misure riportate sono passibili di variazioni in base alla diversa provenienza.


ART. 309F GOMITO FF A 90°



D _f	L (mm)
1/8"	19
1/4"	21
3/8"	25
1/2"	28
3/4"	33
1"	38
1 1/4"	45
1 1/2"	50
2"	58
2 1/2"	69
3"	78
4"	96




ART. 308F TEE



ART. 313F GOMITO MF A 90°



D _f	L (mm)	K (mm)
1/8"	25	19
1/4"	28	21
3/8"	37	25
1/2"	41	28
3/4"	48	33
1"	54	38
1 1/4"	60	45
1 1/2"	70	50
2"	84	58
2 1/2"	96	69
3"	103	78
4"	125	96




ART. 121F
 GOMITO FF A 45°



D _f	L (mm)
1/8"	18
1/4"	19
3/8"	20
1/2"	22
3/4"	25
1"	28
1 1/4"	33
1 1/2"	36
2"	43
2 1/2"	50
3"	56
4"	67



ART. 180F
 CROCE FFF




D _f	A (mm)
1/8"	38
1/4"	42
3/8"	50
1/2"	56
3/4"	66
1"	76
1 1/4"	90
1 1/2"	100
2"	116
2 1/2"	138
3"	156
4"	192

ART. 196F

BOCCHETTONE A GOMITO FF




A RICHIESTA:
 BOCCHETTONE
 A GOMITO
 MASCHIO
 FEMMINA
 FINO A 2"



Ø	L	L ₁
1/4"	38	20
3/8"	45	24
1/2"	52	28
3/4"	55	33
1"	66	38
1 1/4"	74	44
1 1/2"	81	49
2"	96	57

Art. 306F RIDUZIONE MASCHIO FEMMINA



Filettatura		L (mm)
D _{f1}	D _{f2}	
1/4"	1/8"	15
3/8"	1/8"	17
3/8"	1/4"	17
1/2"	1/4"	20
1/2"	3/8"	20
3/4"	3/8"	24
3/4"	1/2"	24
1"	1/2"	27

Filettatura		L (mm)
D _{f1}	D _{f2}	
1"	3/4"	27
1 1/4"	1/2"	31
1 1/4"	3/4"	31
1 1/4"	1"	31
1 1/2"	3/4"	33
1 1/2"	1"	33
1 1/2"	1 1/4"	33
2"	1"	38

Filettatura		L (mm)
D _{f1}	D _{f2}	
2"	1 1/4"	38
2"	1 1/2"	38
2 1/2"	1 1/2"	43
2 1/2"	2"	43
3"	2"	48
3"	2 1/2"	48
4"	2 1/2"	55
4"	3"	55


RACCORDI MICROFUSI

AISI 316 CLASSE ANSI 150 - PN 10

N.B.: Le misure riportate sono passibili di variazioni in base alla diversa provenienza.

ART. 302F



BOCCHETTONE FF
SEDE CONICA



D _f	L (mm)
1/8"	38
1/4"	42
3/8"	43
1/2"	43
3/4"	47
1"	51
1 1/4"	56
1 1/2"	60
2"	68
2 1/2"	81
3"	94
4"	113

ART. 341F


BOCCHETTONE MF
SEDE CONICA



D _f	L (mm)
1/8"	41
1/4"	53
3/8"	57
1/2"	57
3/4"	62
1"	69
1 1/4"	77
1 1/2"	82
2"	95
2 1/2"	112
3"	125
4"	158

★ ARTICOLO SOGGETTO A
CONFEZIONI MINIME DI
FORNITURA.



ART. 310F PORTAGOMMA



Ø	L	CH	D
1/8"	22	13	9
1/4"	24	15	10
3/8"	28	19	12
1/2"	32	24	15
3/4"	36	30	20
1"	36	36	25
1 1/4"	40	46	32
1 1/2"	48	50	40
2"	60	65	50
2 1/2"	64	80	65
3"	67	92	77
4"	70	110	100



ART. 305F

TAPPO FEMMINA



Filettatura D _f	H (mm)	S (mm)
1/8"	13	15
1/4"	15	18
3/8"	17	22
1/2"	19	26
3/4"	22	32
1"	24	39
1 1/4"	27	48
1 1/2"	27	54
2"	32	69
2 1/2"	35	84
3"	38	99
4"	45	125

ART. 304F - TAPPO MASCHIO ESAGONALE



Filettatura D _f	S (mm)	L (mm)
1/8"	12	19
1/4"	17	19
3/8"	19	24
1/2"	23	24
3/4"	29	25
1"	36	30
1 1/4"	45	30
1 1/2"	53	34
2"	63	39
2 1/2"	80	43
3"	89	44
4"	100	55

★ ART. 246F


PROLUNGA MF



1/4"	x 28,5
3/8"	x 31
1/2"	x 37,5
3/4"	x 41
1"	x 46
1 1/4"	x 49
1 1/2"	x 51
2"	x 57

★ ART. 529F

MANICOTTO
RIDOTTO MF




DN 1	DN 2	L	F	SW	BOX
1/4"	1/8"	27	10,8	17	10
3/8"	1/4"	30,5	11,9	21	10
1/2"	3/8"	34,5	12,3	26	10
3/4"	1/2"	38,5	15,6	32	10
1"	3/4"	44	17,5	38	5
1 1/4"	1"	47	20	50	5
1 1/2"	1 1/4"	50	22,3	54	5
2"	1 1/2"	54	23,1	68	5

RACCORDI MICROFUSI
 AISI 316L CLASSE ANSI 150 (PN 10)

N.B.: Le misure riportate sono passibili di variazioni in base alla diversa provenienza.

★ **ART. 319F**



DERIVAZIONE A "Y"



DN	A	L	L1	PESO gr.	box
1/8"	17	10	17	40	10
1/4"	21	13	19	64	10
3/8"	25	14	23	100	10
1/2"	29	18	27	128	10
3/4"	35	20	32	193	10
1"	43	23	38	323	10
1" 1/4	52	28	46	485	5
1" 1/2	58	30	48	565	5
2"	71	34	57	890	1

★ **ART. 197F**


BOCCHETTONE MF SEDE CONICA



DN inch.	L1	L2	T	SW
1/4"	58,6	21	13,5	30
3/8"	61	25	15,5	35
1/2"	71	28	17	42
3/4"	78,7	33	19	47
1"	88,4	38	20,5	53
1" 1/4	102,9	45	23	71
1" 1/2	110,3	50	26	77
2"	119,4	58	28,5	92

★ **ART. 308RF**

TEE RIDOTTO

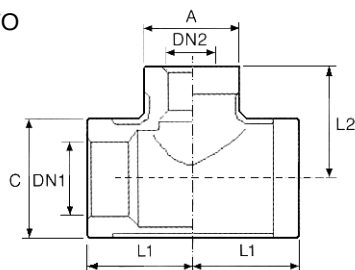



DN 1 inch.	DN 2 inch.	A	C	L1	L2	PESO gr.	BOX
1/4"	1/8"	17	21	18	19	66	10
3/8"	1/4"	21	23	20	22	70	10
1/2"	3/8"	23,5	29	26	25	116	10
3/4"	1/2"	30	37	30	32	230	10
1"	1/2"	30,5	44	32	33,4	307	10
1"	3/4"	35,8	44	35	35	324	5
1" 1/4	1/2"	28,8	51,4	34	38	330	5
1" 1/4	3/4"	35,8	51,4	38	40	376	5
1" 1/4	1"	43,3	51,4	40	42	426	5
1" 1/2	1/2"	28,8	57,9	35	42	420	5
1" 1/2	3/4"	35,8	57,9	38	43	467	5
1" 1/2	1"	43,3	57,9	41	45	517	5
1" 1/2	1" 1/4	51,4	57,9	45	48	579	5
2"	1/2"	28,8	71	38	48	593	5
2"	3/4"	35,8	71	41	49	662	5
2"	1"	43,3	71	44	51	740	5
2"	1" 1/4	51,4	71	48	54	785	5
2"	1" 1/2	57,9	71	52	55	872	5

★ **ART. 111F**

GOMITO 45° CON FLANGIA


★ **ART. 112F**

GOMITO 90° CON FLANGIA



DN	α°	L	A	B	C	D	PESO gr.	box
1/2"	45°	22,8	28,5	55	27	25	146	5
1/2"	90°	27,7	28,5	55	27	25	162	5

ART. 342F BOCCHETTONE DA SALDARE
 A TASCA SEDE CONICA





DN inch.	L	T	SW
1/8"	29	13,5	25
1/4"	37,5	13,5	30
3/8"	38	15,5	35
1/2"	42	17	42
3/4"	50,4	19	47
1"	48	20,5	53
1" 1/4	59	23	71
1" 1/2	65	26	78
2"	69	28,5	92
2" 1/2	80	28,5	112
3"	88	30	127

★ ARTICOLO SOGGETTO A CONFEZIONI MINIME DI FORNITURA.


RACCORDI MICROFUSI

AISI 316 CLASSE ANSI 150 - PN 10


N.B.: Le misure riportate sono passibili di variazioni in base alla diversa provenienza.

ART. 303F NIPPLO


DN	L	CH	DN	L	CH
1/8"	23,6	12,0	1 1/4"	52,5	46,0
1/4"	27,8	16,0	1 1/2"	54,0	50,0
3/8"	28,0	19,0	2"	62,0	65,5
1/2"	34,0	21,6	2 1/2"	70,0	79,5
3/4"	40,0	30,0	3"	78,4	90,0
1"	46,0	36,0	4"	94,0	120,0

ART. 145F
NIPPLO RIDOTTO


DN 1	DN 2	L	SW	DN 1	DN 2	L	SW	DN 1	DN 2	L	SW
1/4"	1/8"	34	18	1" 1/4	1/2"	48	46	2" 1/2	1" 1/4	66	80
3/8"	1/8"	35	21	1" 1/4	3/4"	52	46	2" 1/2	1" 1/2	66	80
3/8"	1/4"	35,5	21	1" 1/4	1"	54	46	2" 1/2	2"	77	76,3
1/2"	1/4"	34	26	1" 1/2	3/4"	53	50	3"	2"	74	95
1/2"	3/8"	41	26	1" 1/2	1"	53	50	3"	2" 1/2	84	92,5
3/4"	1/4"	37	30	1" 1/2	1" 1/4	59	51,5	4"	2"	82	125
3/4"	3/8"	37	30	2"	1"	57	63	4"	2" 1/2	82	125
3/4"	1/2"	45	30	2"	1" 1/4	58	63	4"	3"	94	117,4
1"	1/2"	44,2	35	2"	1" 1/2	65,4	64				
1"	3/4"	50	37	2" 1/2	1"	63	80				

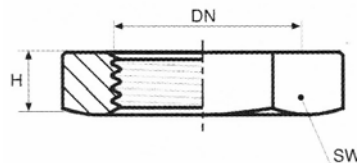ART. 105F CONTRODADO


DN inch	H mm	SW mm	DN inch	H mm	SW mm
1/8"	6,2	14	1 1/4"	11	55
1/4"	7	23	1 1/2"	12	63
3/8"	8	26	2"	13	76
1/2"	10	31	2 1/2"	16	95
3/4"	11	37	3"	19	105
1"	10	46	4"	20	131


RACCORDI RAPIDI INOX 316

SERIE "ISO B"

I RACCORDI TIPO "AS" COSTRUITI COMPLETAMENTE IN AISI 316, HANNO LA TENUTA A SFERE E SIA IL MASCHIO CHE LA FEMMINA SONO DOTATI ENTRAMBI DI VALVOLA DI RITEGNO. CIO' RENDE POSSIBILE DISCONNETTERE IL RACCORDO **SENZA PERICOLO DI FUORIUSCITA** DI LIQUIDO DALLA TUBAZIONE.

GAS-DN	B	C	D	CH	BAR
1/4"	67	53	27	20	350
3/8"	80	62	33	25	300
1/2"	93	73	40	30	220
3/4"	106	81	48	36	220
1"	123	98	59	43	180
1.1/4"	140	110	70	50	120
1.1/2"	147	117	82	55	120
2"	180	140	113	70	100

TEMPERATURA: **-40 +120 C°**
 O-RINGS: **VITON**
 A RICHIESTA: **EPDM - KAFLO**

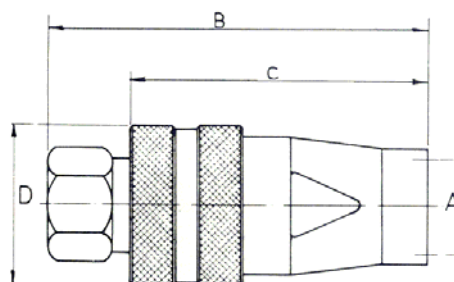

CON VALVOLE DI RITEGNO AMBO I LATI !