




RACCORDI MICROFUSI

AISI 316 CLASSE ANSI 150 - PN 10


N.B.: Le misure riportate sono passibili di variazioni in base alla diversa provenienza.

ART. 303F NIPPLO


DN	L	CH	DN	L	CH
1/8"	23,6	12,0	1 1/4"	52,5	46,0
1/4"	27,8	16,0	1 1/2"	54,0	50,0
3/8"	28,0	19,0	2"	62,0	65,5
1/2"	34,0	21,6	2 1/2"	70,0	79,5
3/4"	40,0	30,0	3"	78,4	90,0
1"	46,0	36,0	4"	94,0	120,0

ART. 145F
NIPPLO RIDOTTO


DN 1	DN 2	L	SW	DN 1	DN 2	L	SW	DN 1	DN 2	L	SW
1/4"	1/8"	34	18	1" 1/4	1/2"	48	46	2" 1/2	1" 1/4	66	80
3/8"	1/8"	35	21	1" 1/4	3/4"	52	46	2" 1/2	1" 1/2	66	80
3/8"	1/4"	35,5	21	1" 1/4	1"	54	46	2" 1/2	2"	77	76,3
1/2"	1/4"	34	26	1" 1/2	3/4"	53	50	3"	2"	74	95
1/2"	3/8"	41	26	1" 1/2	1"	53	50	3"	2" 1/2	84	92,5
3/4"	1/4"	37	30	1" 1/2	1" 1/4	59	51,5	4"	2"	82	125
3/4"	3/8"	37	30	2"	1"	57	63	4"	2" 1/2	82	125
3/4"	1/2"	45	30	2"	1" 1/4	58	63	4"	3"	94	117,4
1"	1/2"	44,2	35	2"	1" 1/2	65,4	64				
1"	3/4"	50	37	2" 1/2	1"	63	80				

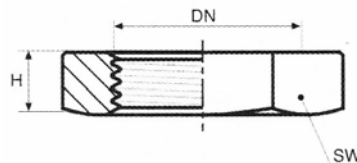ART. 105F CONTRODADO


DN inch	H mm	SW mm	DN inch	H mm	SW mm
1/8"	6,2	14	1 1/4"	11	55
1/4"	7	23	1 1/2"	12	63
3/8"	8	26	2"	13	76
1/2"	10	31	2 1/2"	16	95
3/4"	11	37	3"	19	105
1"	10	46	4"	20	131


RACCORDI RAPIDI INOX 316

SERIE "ISO B"

I RACCORDI TIPO "AS" COSTRUITI COMPLETAMENTE IN AISI 316, HANNO LA TENUTA A SFERE E SIA IL MASCHIO CHE LA FEMMINA SONO DOTATI ENTRAMBI DI VALVOLA DI RITEGNO. CIO' RENDE POSSIBILE DISCONNETTERE IL RACCORDO **SENZA PERICOLO DI FUORIUSCITA** DI LIQUIDO DALLA TUBAZIONE.

GAS-DN	B	C	D	CH	BAR
1/4"	67	53	27	20	350
3/8"	80	62	33	25	300
1/2"	93	73	40	30	220
3/4"	106	81	48	36	220
1"	123	98	59	43	180
1.1/4"	140	110	70	50	120
1.1/2"	147	117	82	55	120
2"	180	140	113	70	100

TEMPERATURA: **-40 +120 C°**
 O-RINGS: **VITON**
 A RICHIESTA: **EPDM - KAFLO**

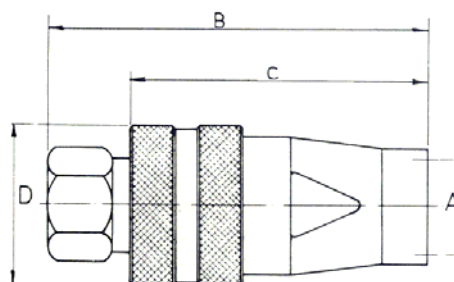

CON VALVOLE DI RITEGNO AMBO I LATI !