
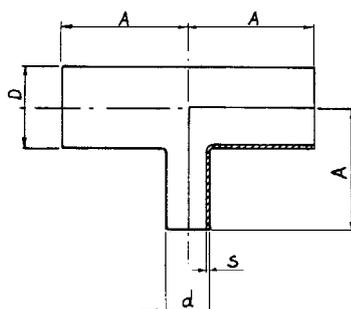
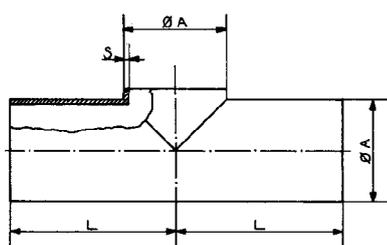


RACCORDI A TEE E CROCI INOX

COSTRUITI IN AISI 304L E 316L VENGONO RICAVATI (FINO A 4") DA TUBO SALDATO ESTRUDENDO LA DERIVAZIONE CENTRALE A CUI VIENE SALDATO UN TRONCHETTO DI UGUALE SPESSORE E DIAM. OLTRE IL DIAMETRO DI 4" VENGONO RICAVATI PER STAMPAGGIO IN DUE META'.

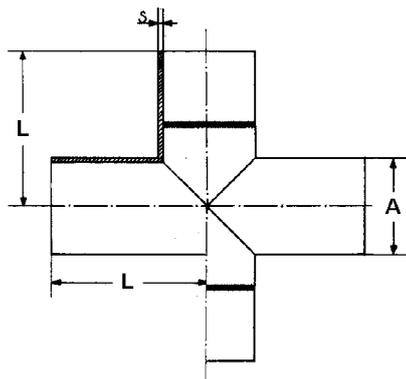

DN	Inches	A	S	L
10	3/8	17,2	1,5	22
15	1/2	21,3	2	25,4
20	3/4	26,9	2	28,5
25	1"	33,7	2/3	38,1
32	1 1/4	42,4	2/3	47,6
40	1 1/2	48,3	2/3	57,1
50	2"	60,3	2/3	63,5
65	2 1/2	76,1	2/3	76,1
80	3"	88,9	2/3	85,7
100	4"	114,3	2/3	104,7
	3 1/2	101,6	2/3	105
125	5"	141,3	2/3	123,8
150	6"	168,3	2/3	142,8
200	8"	219,1	2/3	177,8
250	10"	273	2/3	215,9
300	12"	323,9	3/4	254
350	14"	355,6	3/4	279,4
400	16"	406,4	3/4	304,8
450	18"	457,2	3/4	342,9
500	20"	508	3/4	381
600	24"	609,6	3/4	431,8


NORMA: EN 10253-3

A RICHIESTA: TEES CON MISURE METRICHE
TEES RIDOTTI SERIE "ISO"
CROCI RIDOTTE SERIE "ISO"

Fornibili anche in versione idroformata chiamati anche "tees sboccati" senza la derivazione centrale saldata



RACCORDI INOX
A NORME ANSI B16.9 - B 16.28

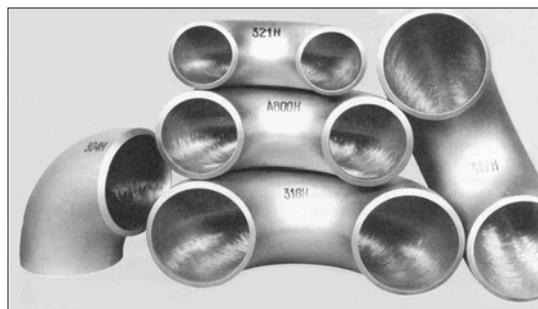

DIMENSIONI E FIGURE: VEDI PAG. 134