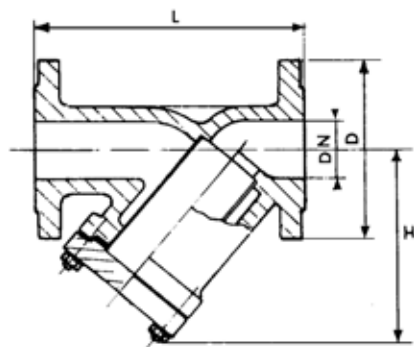




FILTRI A “Y” PN 16 - 25/40

ART. 148G - D...
A PAG. 224
**VERSIONE
IN ACCIAIO
INOX**

MATERIALI	PN 16	PN 25/40
CORPO	GHISA GG 25	ACCIAIO C25
CAPPELLO	GHISA GG 25	ACCIAIO C25
FILTRO	AISI 304	AISI 304

DIMENSIONI

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L PN 16-40	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
H PN 16-40	80	85	105	110	130	140	205	225	230	280	310	400	515	560	620	710
L PN 64	210	220	230	250	260	300	340	380	430	500	550	650	790	900	1050	1200
L PN 100	210	220	230	250	260	300	340	380	430	500	550	650	850	1050	1200	1350
H PN 64-100	130	130	140	160	190	205	230	240	270	335	375	460				
Fori cestello in mm.	0,5	0,5	0,8	0,8	0,8	0,8	0,8	0,8	1	1	1	1	1,6	1,6	1,6	1,6

FILTRI A “Y” ANSI 150 - 300

VERSIONE FLANGIATA

VERSIONE A SALDARE
**CORPO E COPERCHIO
ASTM A 216 WCB**
FILTRO INOX
*A pag. 108 - 223
le versioni
filettate*

PRESE DI FONDO IN GHISA IN ACCIAIO SALDATO - PN 10
FIG. 104 : CORPO IN ACCIAIO SALDATO - CESTELLO IN LAMIERA FORATA ZINCATA
FIG. 104

DN	d1	d2	H
50	156	111	80
65	176	131	100
80	192	148	120
100	212	168	150
125	242	198	175
150	276	222	200
200	332	278	250
250	385	329	300

