


RUBINETTI E VALVOLE INOX




ART. 580T - VALVOLA A SFERA A PASSAGGIO RIDOTTO (TIPO ECONOMICO)
"MINIGLOBE"

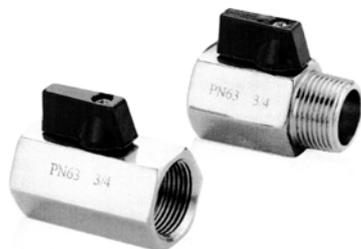

CORPO SFERA E STELO IN AISI 316
MANIGLIA IN ALLUMINIO
GUARNIZIONI IN PTFE
Oring IN "NBR"

TEMP. -25 +150 C°
PN max 63 bar


Misura	Tipo	A	L	M	P	Peso gr
1/4"	Femmina / Femmina	26	40	22	8	92
3/8"		26	40	22	8	92
1/2"		28	46	22	10	125
3/4"		34	54	22	12	211
1"	Femmina / Femmina	34	65	22	15	300
1/4"	Maschio / Femmina	26	40	22	8	83
3/8"		26	40	22	8	82
1/2"		28	46	22	10	116
3/4"		34	54	22	12	193
1"	Maschio / Femmina	34	65	22	15	280

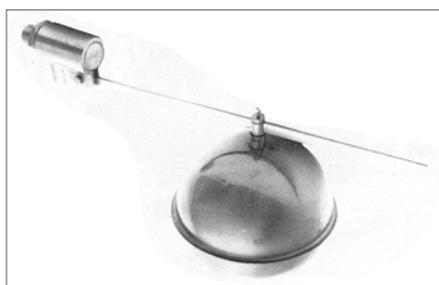

ART. 306

REGOLATORE DI LIVELLO IN AISI 304 O AISI 316

ATTACCO MASCHIO GAS.
GALLEGGIANTE REGOLABILE
IN FUNZIONE DELLA PRESSIO-
NE DI ALIMENTAZIONE.

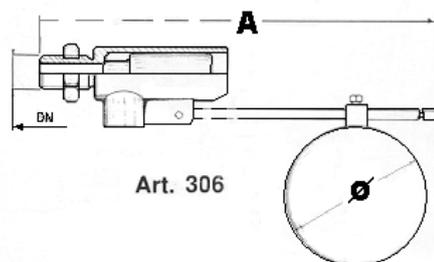

Art. 306


DN	A	B	
		2 Bar	4 Bar
3/8"	447	105	120
1/2"	506	120	160
3/4"	490	160	220
1"	590	220	240
1 1/4"	600	220	240
1 1/2"	620	240	260
2"	670	260	300




D	A
90	1/4" gas
110	1/4" gas
120	1/4" gas
160	1/4" gas
220	3/8" gas
240	3/8" gas
300	3/8" gas

ART. 311 GALLEGGIANTE

ACCIAIO INOX AISI 304 STAMPATO
A FREDDO E SALDATO AL TIG.
MANICOTTO INOX 304 BRASATO.



RUBINETTI SEMIAUTOMATICI INOX AISI 304 PER RIEMPIMENTO DI FUSTI.

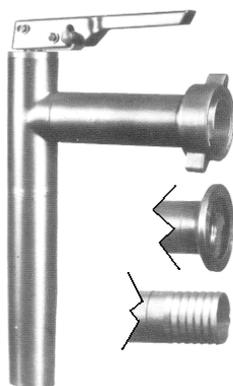

ART. 121

con Girello

Ø 25-30-35-40-50

ART. 122

a Morsetto

Ø 40-50

ART. 123

con Portagomma

Ø 25-30-35-40-50

ART. 182

RIEMPIDAMIGIANA IN AISI 304
DIAM. 1"

